








547582B

| references : | 4 | 3 | 1 | 2 | 3 | 4 |
|--------------|---|---|---|---|---|---|
|              | 2 | 3 | 0 | 3 | 0 | 2 |
|              | 3 | 4 | 1 | 0 | 4 |   |
|              | 5 |   |   | 0 | 6 |   |
|              |   |   |   | 1 | 0 |   |

|                |         |         |            |
|----------------|---------|---------|------------|
| 1              | 2       | 3       | 4          |
| 2 = I - II     | 3 = 3 P | 0 = (A) | 02 = 25 A  |
| 3 = I - 0 - II | 4 = 4 P | 1 = (B) | 04 = 40 A  |
| 5 = Bypass     |         |         | 06 = 63 A  |
|                |         |         | 10 = 100 A |

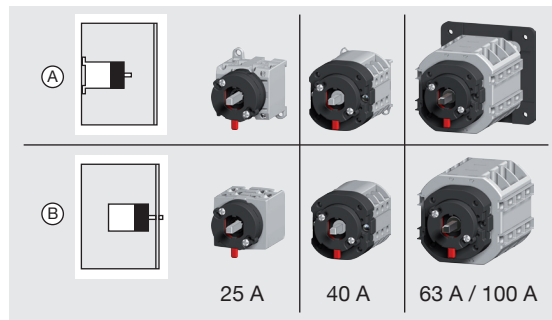


| Ith (A) | Cu (mm²)   | AWG Cu |             | (Nm/lbin)             | mm / in                                                                 |
|---------|------------|--------|-------------|-----------------------|-------------------------------------------------------------------------|
| 25      | 0.5 ... 4  | 14-12  | PZ2         | 0.8-1.2 / 7.1 - 10.6  | 8 <sup>+1</sup> <sub>-2</sub> / 0.31 <sup>+0.04</sup> <sub>-0.08</sub>  |
| 40      | 1 ... 10   | 14-8   | PZ2         | 1.2-1.5 / 10.6 - 13.3 | 10 <sup>+1</sup> <sub>-2</sub> / 0.39 <sup>+0.04</sup> <sub>-0.08</sub> |
| 63      | 1.5 ... 16 | 14-4   | FLAT 6.5 mm | 2.5 / 22.1            | 13 <sup>+2</sup> <sub>-2</sub> / 0.51 <sup>+0.08</sup> <sub>-0.08</sub> |
| 100     | 4 ... 35   | 10-2   | PH1         | 1.5 / 13.3            | 13 <sup>+2</sup> <sub>-2</sub> / 0.51 <sup>+0.08</sup> <sub>-0.08</sub> |

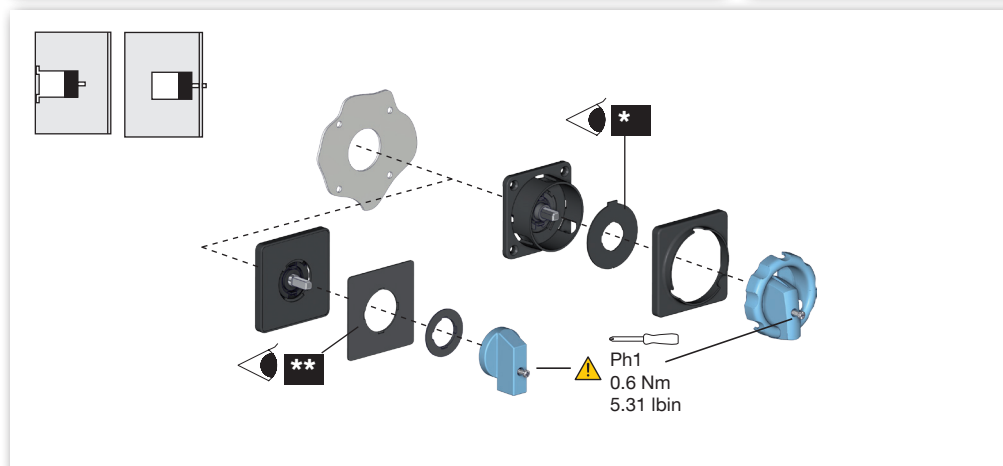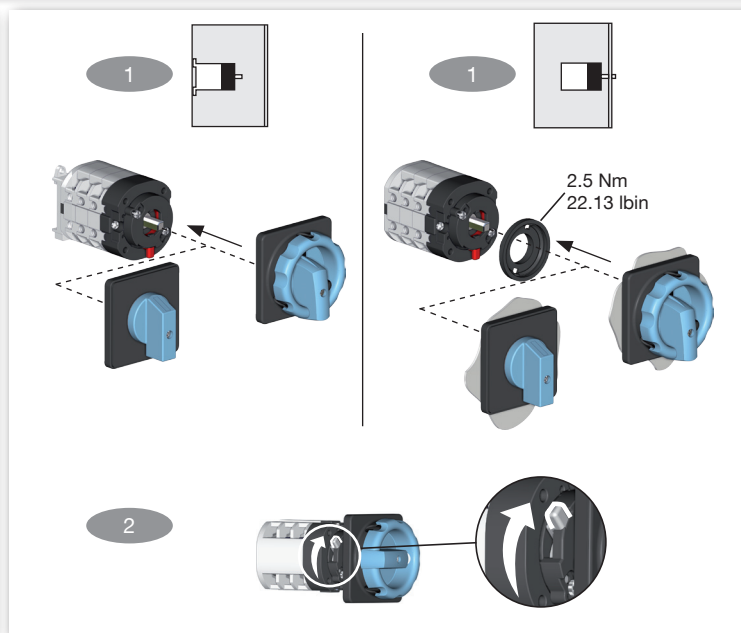
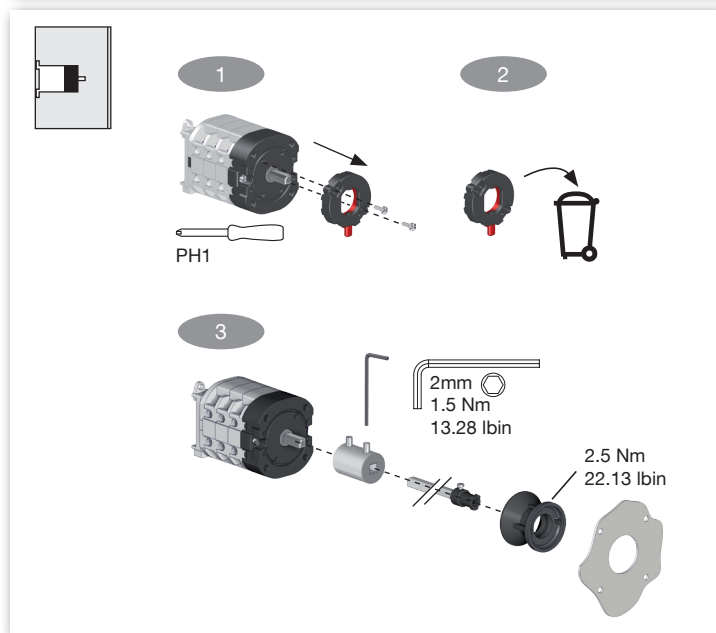
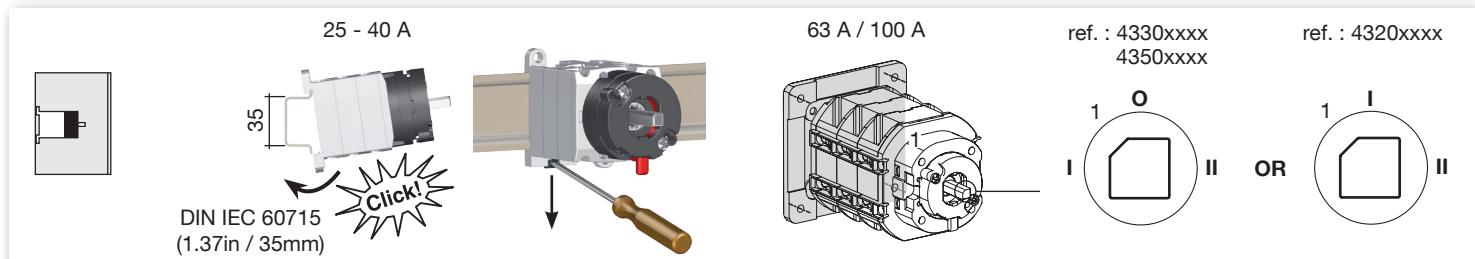


Interchangeable plate / plaque interchangeable / Placa intercambiabile / Austauschbare Platte / Piastra intercambiabile / Verwisselbare plaat / Tabliczka zamienna / Placa substituível / 可互换的板

ref. : 4320xxxx


ref. : 4330xxxx  
4350xxxx






- Hazardous voltage when padlocked in position I
- Tension dangereuse lorsque le produit est cadassé en position I
- Tensión peligrosa cuando se bloquea en posición I
- Gefährliche Spannung, wenn mit Vorhängeschloss in Position I verriegelt
- Tensione pericolosa se lucchettato in posizione I
- Gevaarlijke spanning indien vergrendeld in positie!
- Niebezpieczne napięcie po zablokowaniu w położeniu I
- Tensão perigosa quando bloqueado na posição I
- 挂锁在位置I时的危险电压

Ø = 0.35 / 9

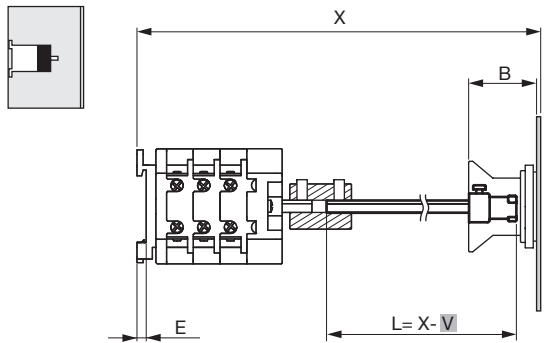


| lth (A)  | V (in/mm) |         |           |             |             |             |             |             | E (in/mm) |     | B (in/mm) |      |
|----------|-----------|---------|-----------|-------------|-------------|-------------|-------------|-------------|-----------|-----|-----------|------|
|          | 1 2 3     | 1 2 3 4 | 1 2 3 4 5 | 1 2 3 4 5 6 | 1 2 3 4 5 6 | 1 2 3 4 5 6 | 1 2 3 4 5 6 | 1 2 3 4 5 6 |           |     |           |      |
| 25       | 3.75      | 80.1    | 3.63      | 92.1        | 4.10        | 104.1       | 4.57        | 116.1       | 0.18      | 4.5 | 1.24      | 31.6 |
| 40       | 3.54      | 90      | 4.06      | 10.3        | 4.57        | 116         | 5.08        | 129         | 0.18      | 4.5 | 1.24      | 31.6 |
| 63...100 | 5.06      | 128.5   | 5.89      | 149.5       | 6.71        | 170.5       | 7.54        | 191.5       | -         | -   | 1.24      | 31.6 |

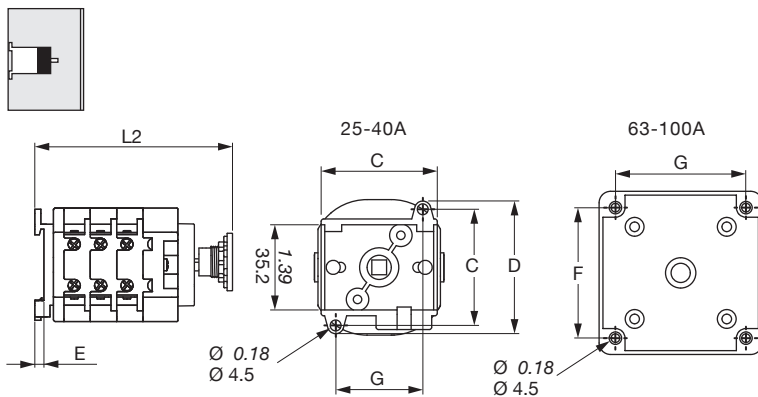


| lth (A)  | L2 (in/mm) |         |           |             |             |             |             |             | E (in/mm) |     |
|----------|------------|---------|-----------|-------------|-------------|-------------|-------------|-------------|-----------|-----|
|          | 1 2 3      | 1 2 3 4 | 1 2 3 4 5 | 1 2 3 4 5 6 | 1 2 3 4 5 6 | 1 2 3 4 5 6 | 1 2 3 4 5 6 | 1 2 3 4 5 6 |           |     |
| 25       | 3.20       | 81.4    | 3.68      | 93.4        | 4.15        | 105.4       | 4.57        | 116.1       | 0.18      | 4.5 |
| 40       | 3.73       | 94.7    | 4.28      | 107.7       | 4.28        | 120.7       | 5.08        | 129         | 0.18      | 4.5 |
| 63...100 | 5.10       | 129.5   | 5.97      | 151.5       | 6.83        | 173.5       | 7.54        | 191.5       | -         | -   |

| (A)      | C (in/mm) | D (in/mm) | F (in/mm) | G (in/mm) |
|----------|-----------|-----------|-----------|-----------|
| 25       | 1.89      | 48        | 2.2       | 56        |
| 40       | 1.89      | 48        | 2.2       | 56        |
| 63...100 | 2.99      | 76        | 2.99      | 76        |

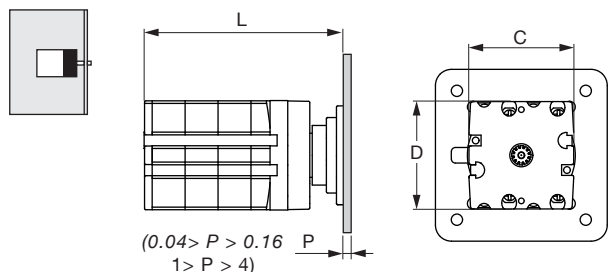


| lth (A)  | L (in/mm) |         |           |             |             |             |             |             | C (in/mm) |      | D (in/mm) |    |
|----------|-----------|---------|-----------|-------------|-------------|-------------|-------------|-------------|-----------|------|-----------|----|
|          | 1 2 3     | 1 2 3 4 | 1 2 3 4 5 | 1 2 3 4 5 6 | 1 2 3 4 5 6 | 1 2 3 4 5 6 | 1 2 3 4 5 6 | 1 2 3 4 5 6 |           |      |           |    |
| 25       | 3.19      | 81      | 3.66      | 93          | 4.13        | 105         | 4.61        | 117         | 1.54      | 39   | 1.57      | 40 |
| 40       | 3.31      | 84      | 4.82      | 97          | 4.33        | 110         | 4.84        | 123         | 2.11      | 53.6 | 2.2       | 56 |
| 63...100 | 4.45      | 113     | 5.28      | 134         | 6.1         | 155         | 6.93        | 176         | 2.91      | 74   | 2.8       | 71 |

ref. : 4320xxxx



ref. : 4330xxxx



Bypass 3P  
ref. : 43503xxx

